







HUAYUE GROUP



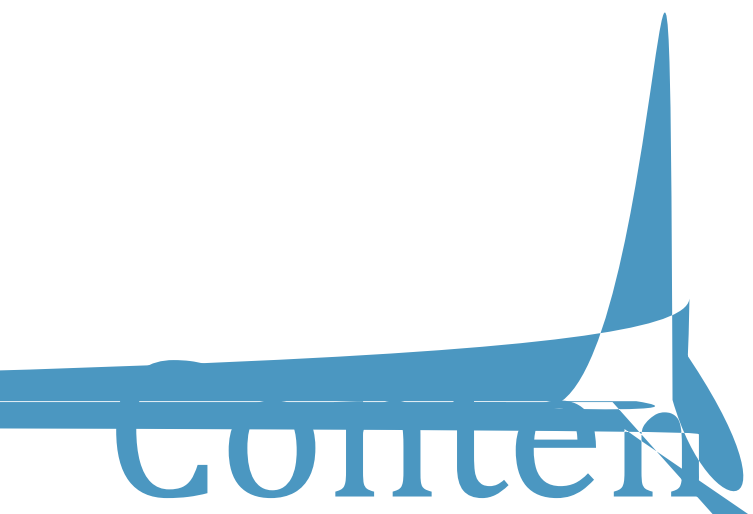

Content

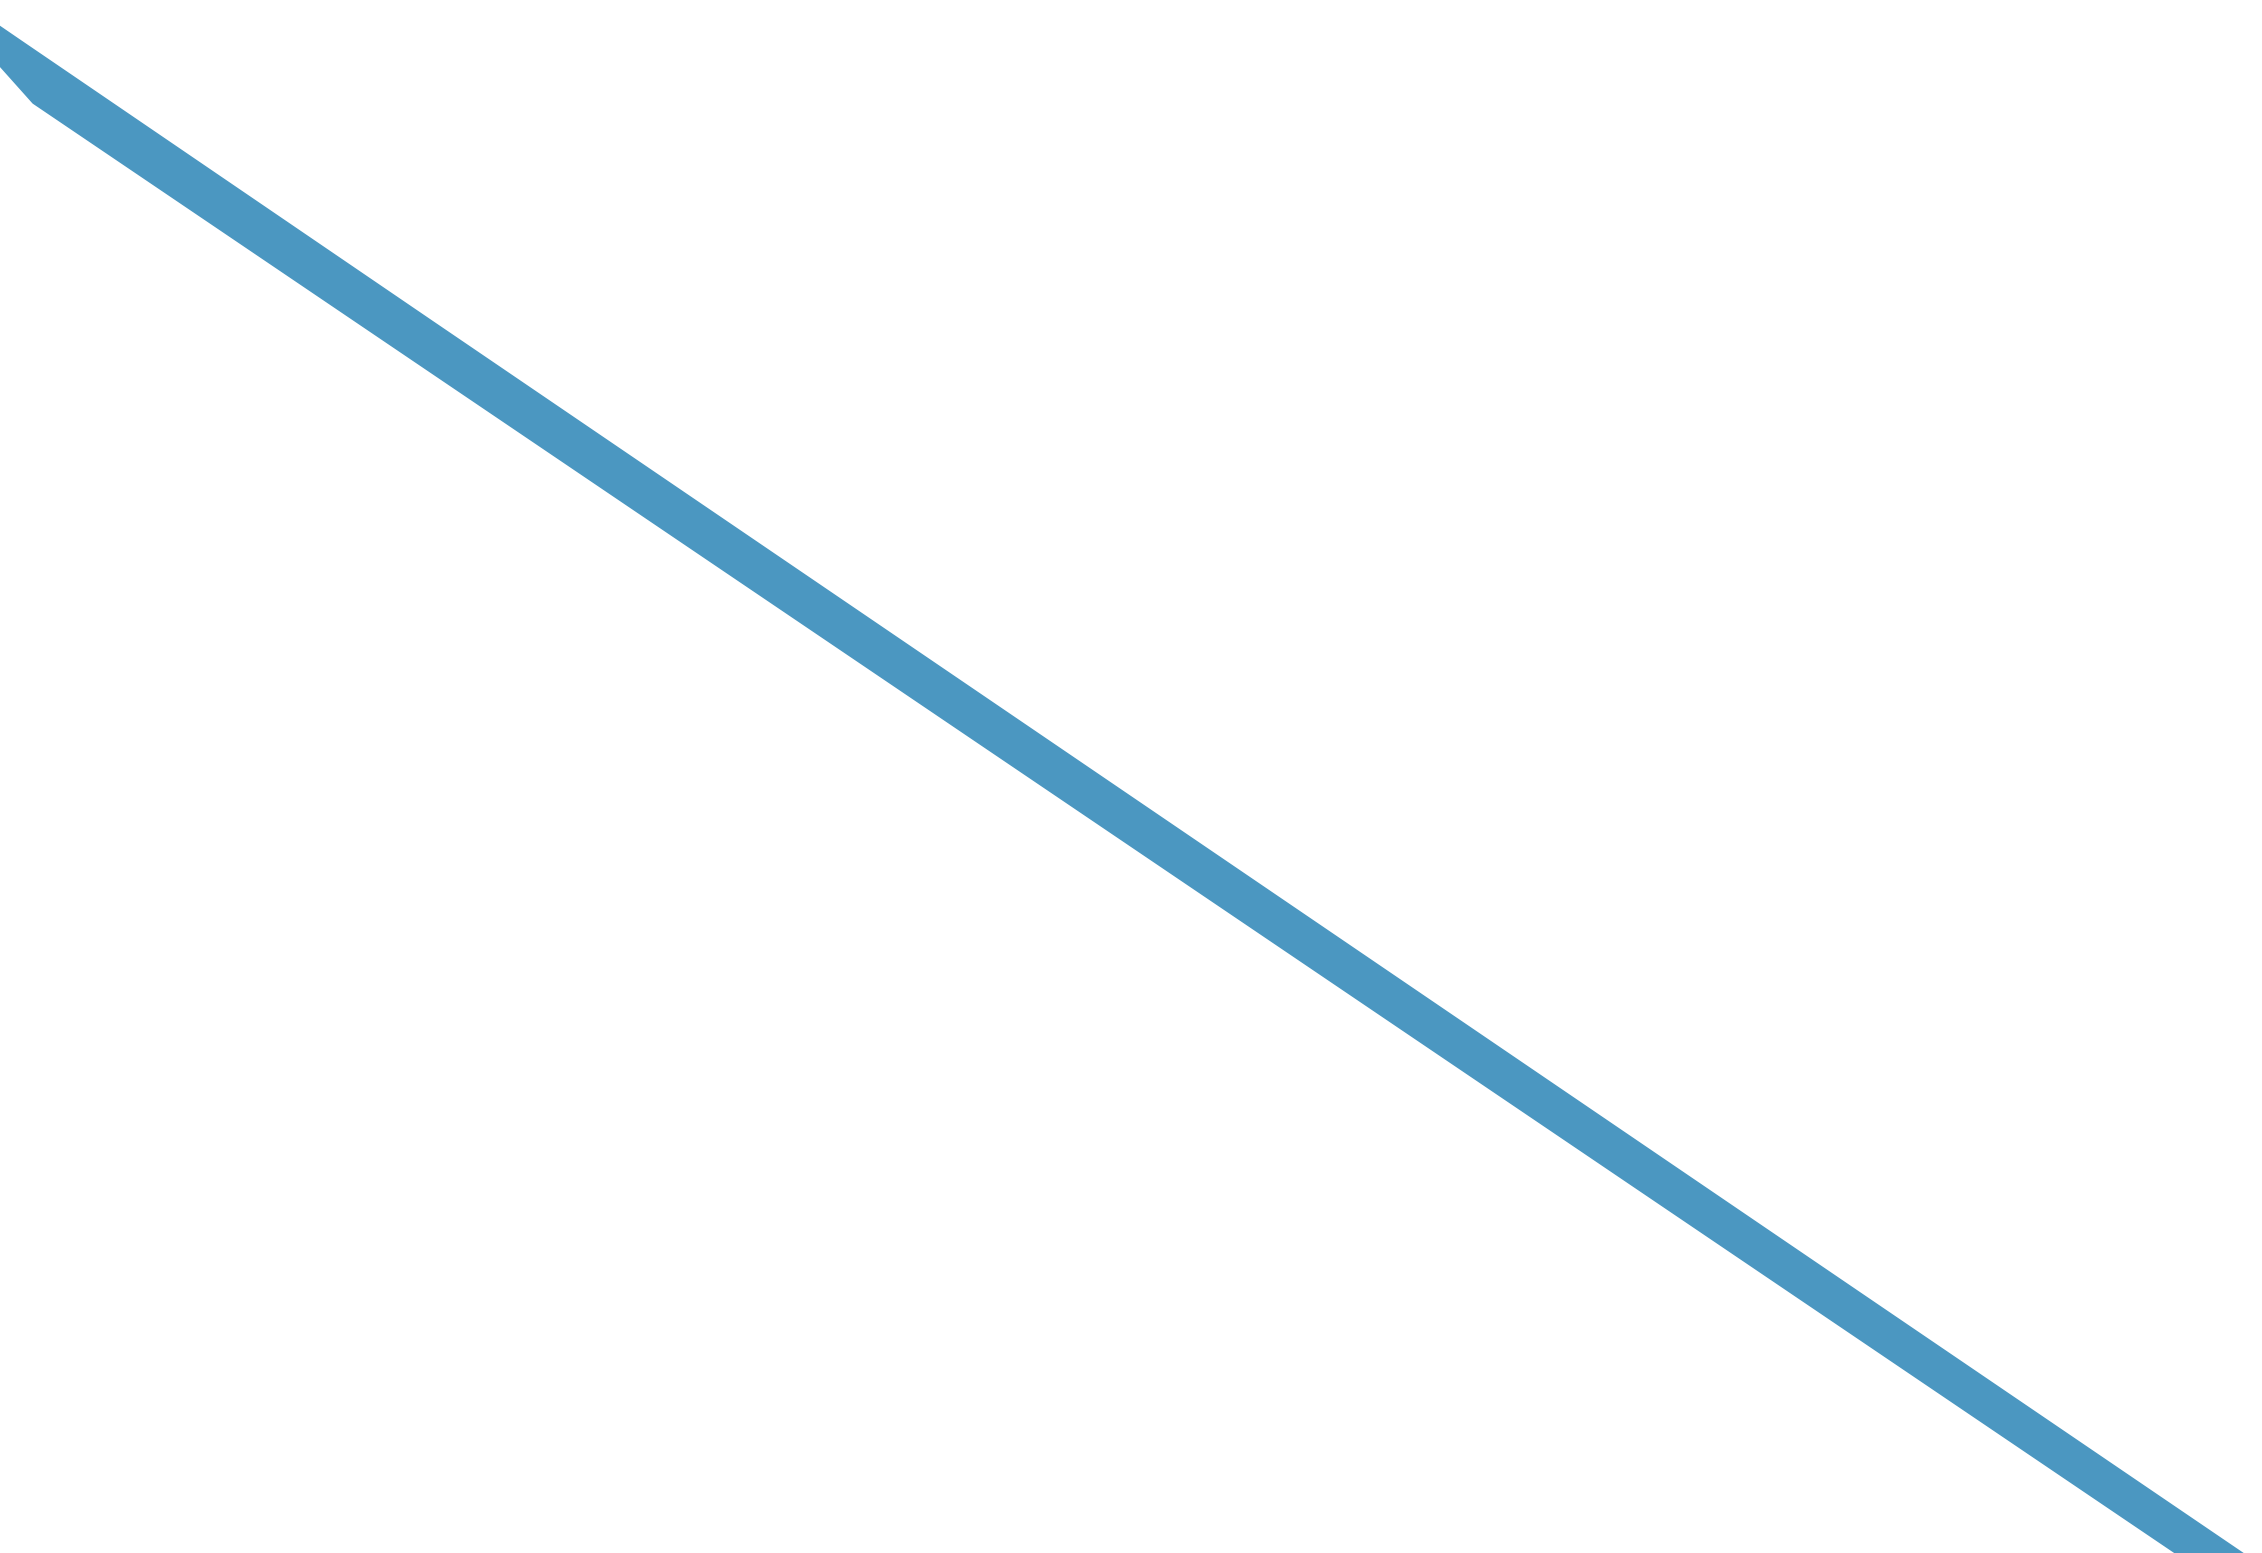

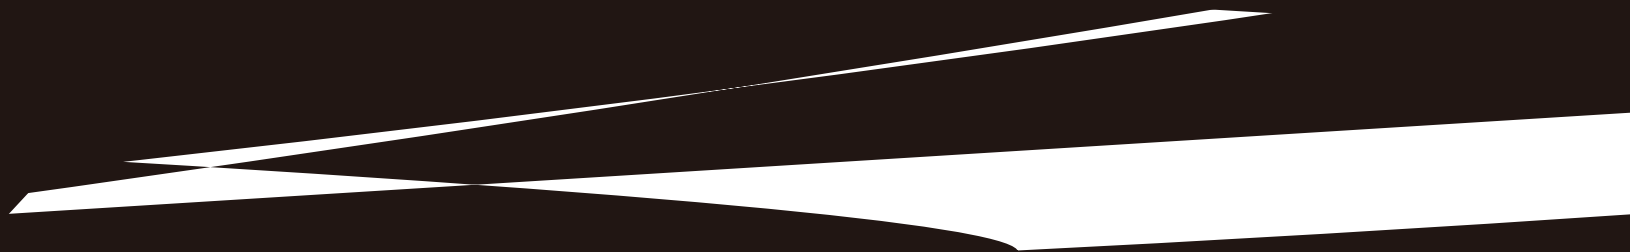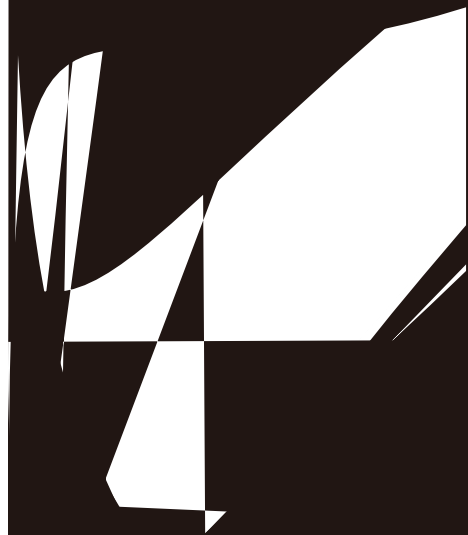

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

1


地, 可中 口天行地地







不锈钢管 VS PPR水管

技术优势

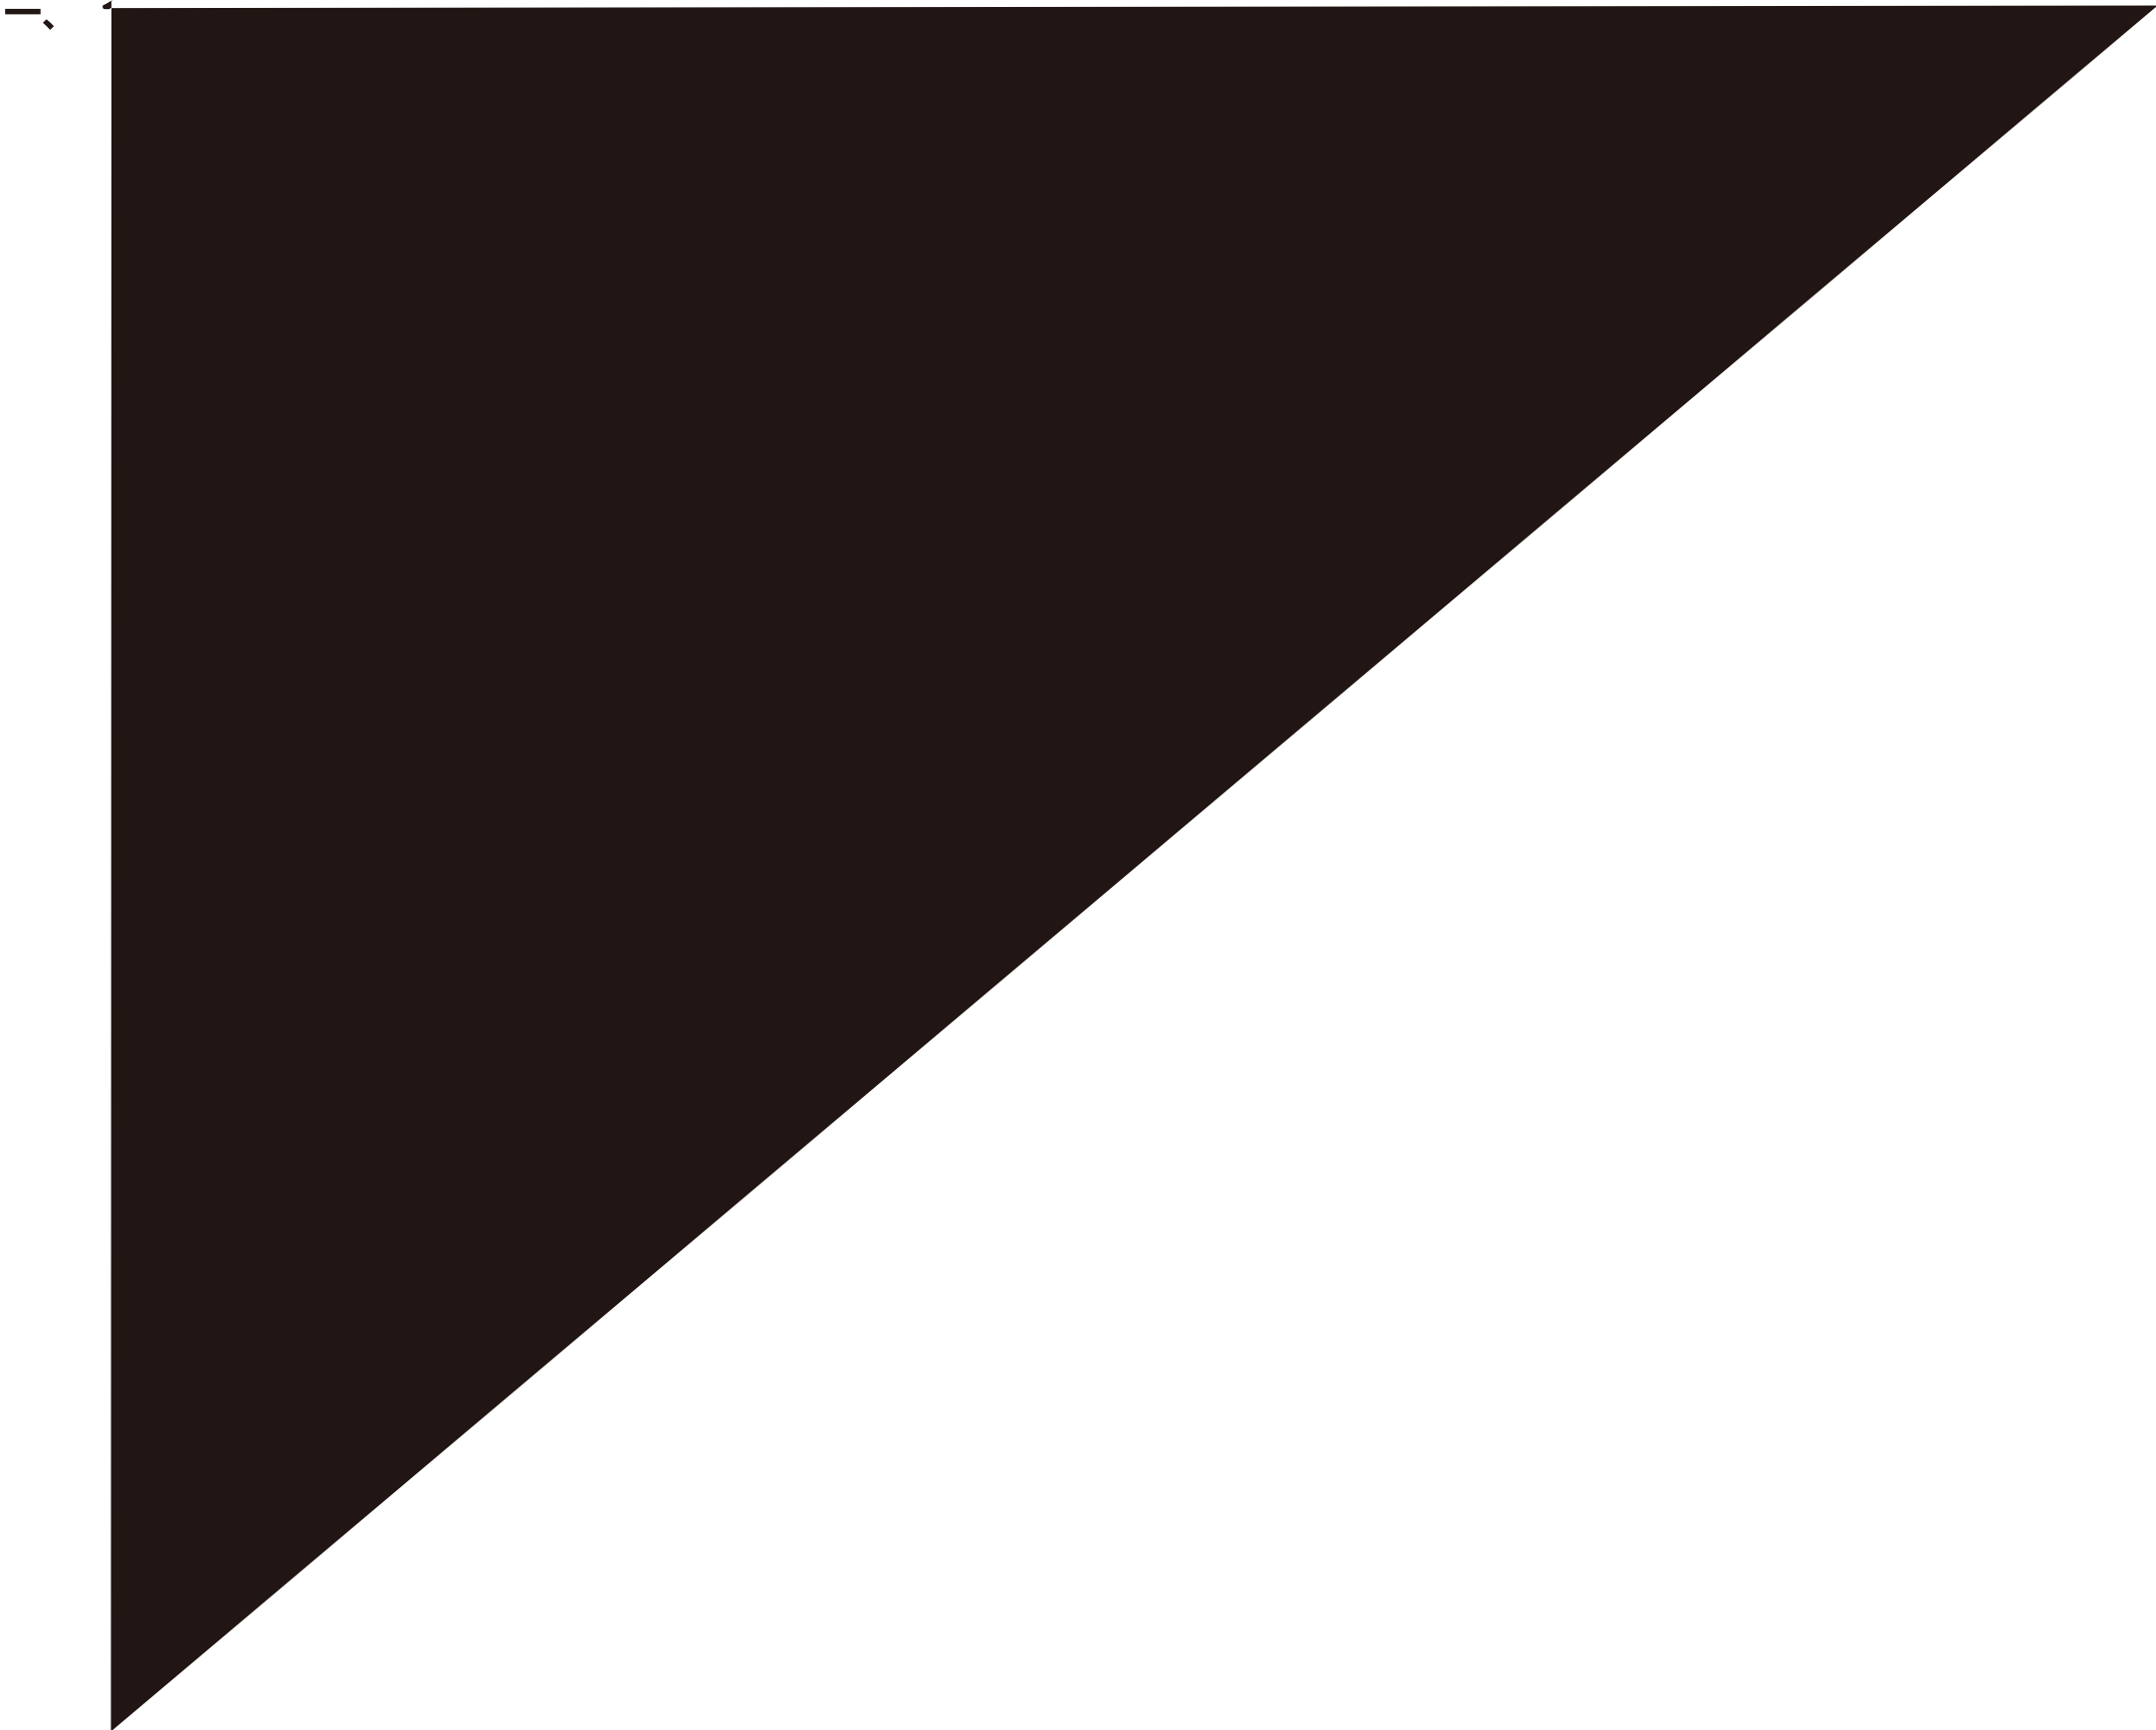



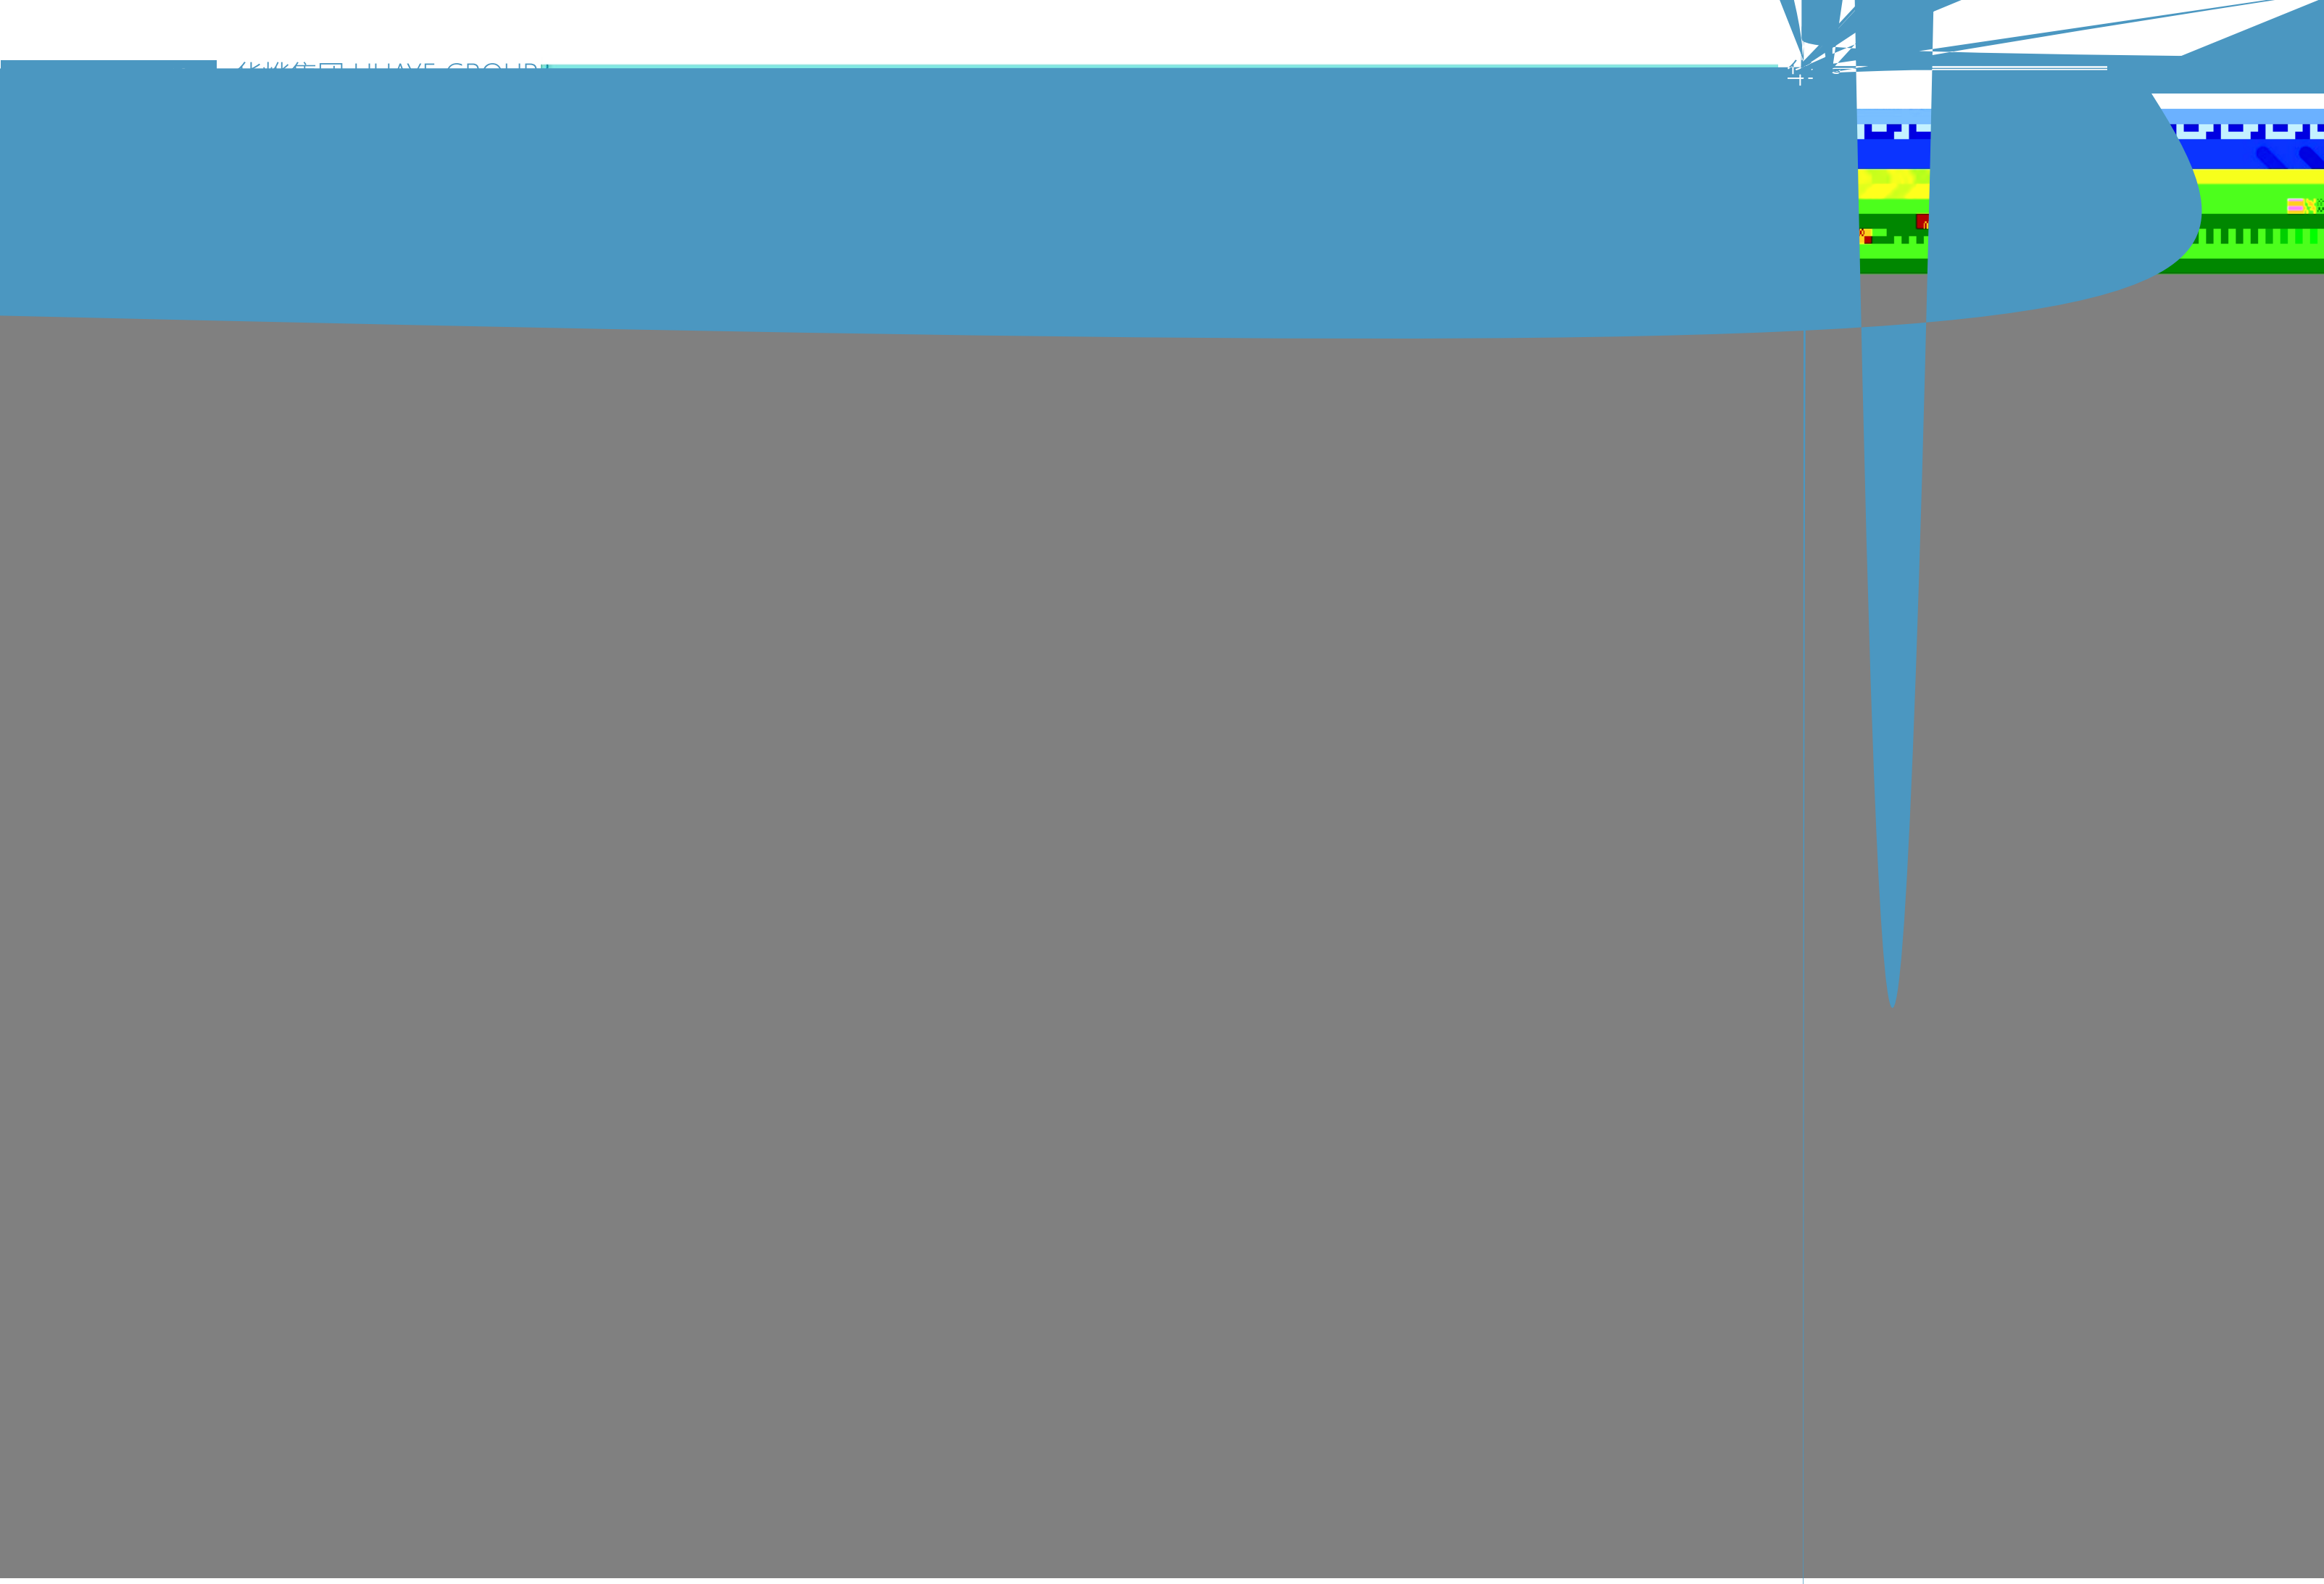

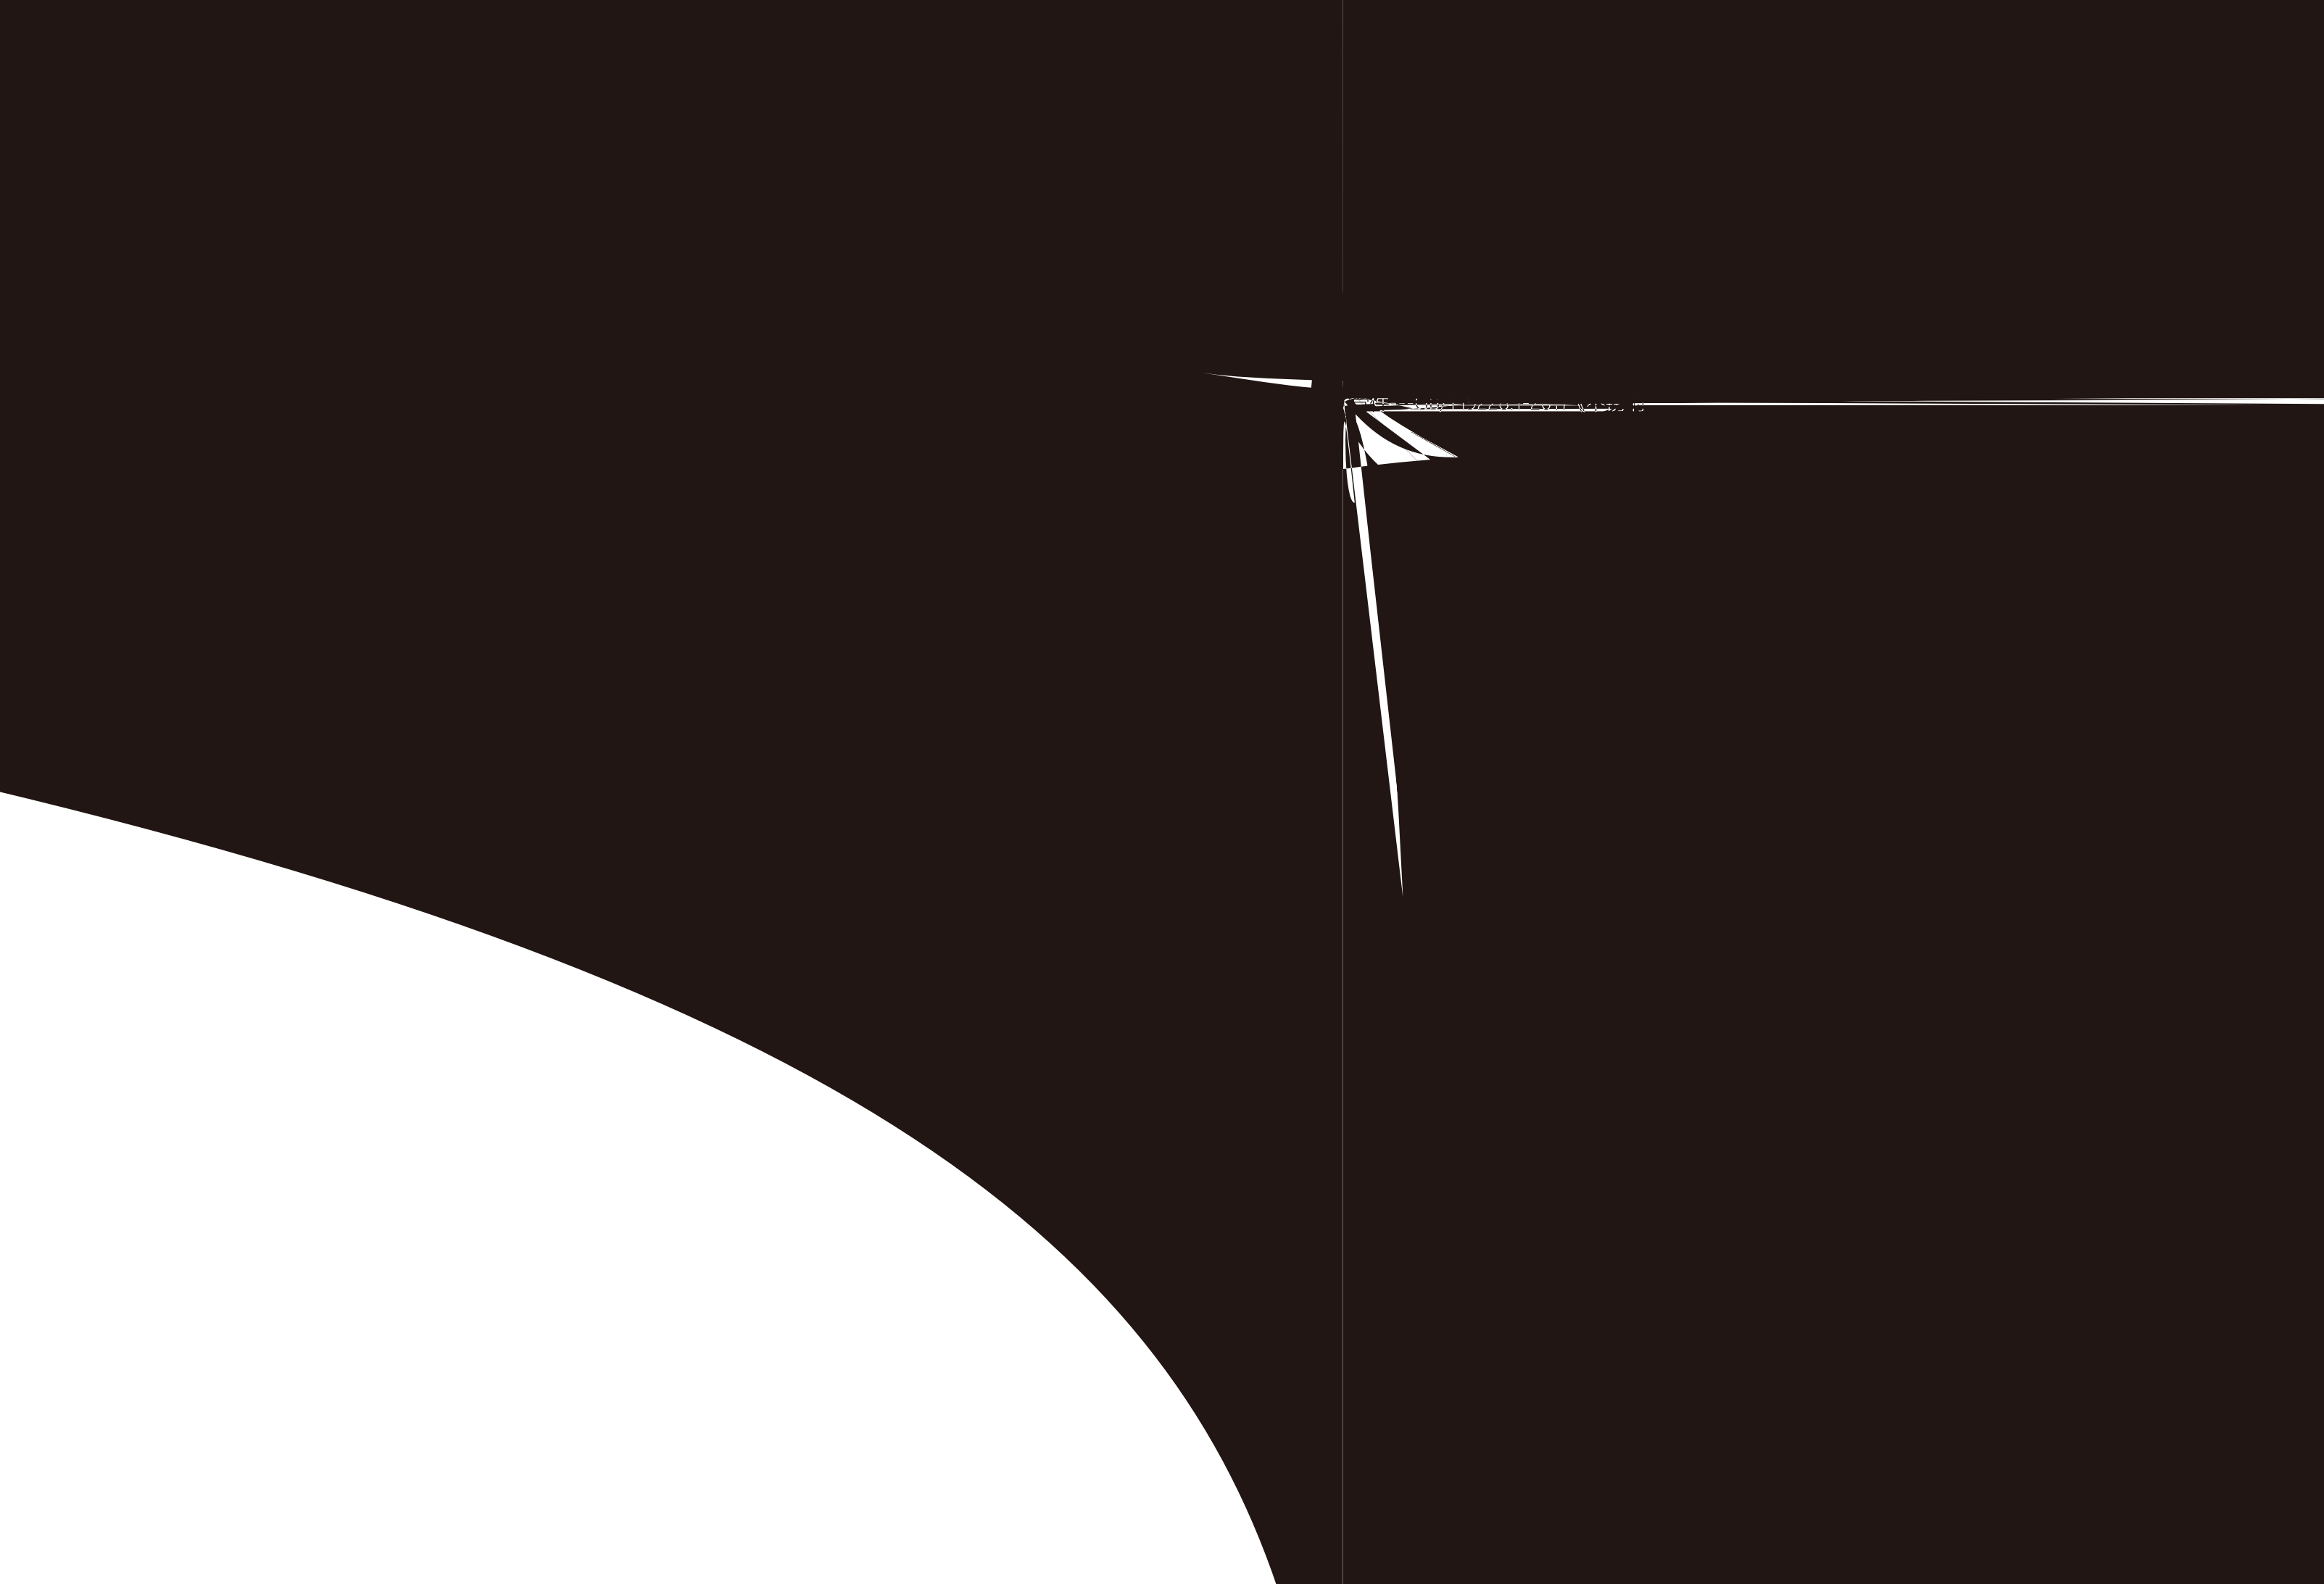





外螺纹转换接头

1	R <sup>1/4</sup>	
2	R <sup>3/4</sup>	
3	R1	*65×R2 <sup>1/2</sup>
4	R1	*80×R3
32	R <sup>1/4</sup>	*100×R4

EDN	
1	R <sup>1/4</sup>
2	R <sup>3/4</sup>
3	R1
4	R1
32	R <sup>1/4</sup>

公称通径DN		
15×R½	32×R¾	40×R1½
20×R½	32×R1	50×R½
20×R¾	32×R1¼	50×R¾
25×R½	40×R½	50×R1
25×R¾	40×R¾	50×R1¼
25×R1	40×R1	50×R1½
32×R½	40×R1¼	50×R2
*65×R½		











## 服务

客户需求多样  
自身规模生产优